			MOTORES DE C.C. - DC MOTORS DUNKER GR63x55					
			GR63x55 12V			GR63x55 24V		
Reducción Ratio <b>i = X:1</b>	Nº Etapas Stages	Eficiencia Efficiency	No load speed Vo (r.p.m.)	Nominal Speed Vn (r.p.m.)	Nominal Torque (N.m)	No load speed Vo (r.p.m.)	Nominal Speed Vn (r.p.m.)	Nominal Torque (N.m)
9,9	2	0,81	353,54	303,03	1,92	368,69	338,38	2,17
16	2	0,81	218,75	187,50	3,11	228,13	209,38	3,50
32,9	3	0,73	106,38	91,19	5,76	110,94	101,82	6,48
64	3	0,73	54,69	46,88	<b>Ex.</b> Torque max. 8 N·m	57,03	52,34	<b>Ex.</b> Torque max. 8 N·m
109	4	0,66	32,11	27,52		33,49	30,73	
128	4	0,66	27,34	23,44		28,52	26,17	
158	4	0,66	22,15	18,99		23,10	21,20	
178	4	0,66	19,66	16,85		20,51	18,82	
315	5	0,59	11,11	9,52		11,59	10,63	
426	5	0,59	8,22	7,04		8,57	7,86	
512	5	0,59	6,84	5,86		7,13	6,54	


**NO LOAD SPEED / RATED TORQUE**

Motor GR63x55 -12V = 3500 rpm / 0,24 Nm

Motor GR63x55 -24V = 3650 rpm / 0,27 Nm

**Ex** Exceeds maximal admissible torque

**GR63x55 12V**

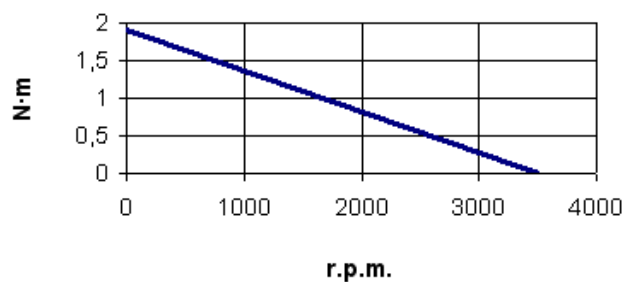

**GR63x55 24V**

